

LED STRIPS AND EXTRUSIONS




QTL.lighting


LED STRIPS



Lumens/ft:
Up to 1159
at 9.0W/ft



Color
Temperature:
1900K-5500K



CRI:
Up to 99



Color:
SW, SW-HE, SW-IA,
DW-HE, SC, RGB,
RGBW, RGBW-HE



Options comply with
Buy American Act

Declare. 

All LED strips have
Declare labels and wet
rated LED strips are
Red List Approved

STATIC WHITE

- 6 diodes per 1" cut point
- 98+ CRI at 3000K
- 1-Bin, 1-Step
- Excellent TM30 performance
- Dry, damp, and wet rated

STATIC WHITE HIGH EFFICACY

- 8 diodes per 2" cut point
- More lumens per watt
- 95+ CRI at 3000K
- 1-Bin, 1-Step
- Dry, damp, and wet rated

STATIC WHITE HIGH EFFICACY PLUS

- 9 diodes per 2" cut point
- More lumens per watt
- 90+ CRI at 3000K
- Dry and wet rated

STATIC WHITE INDIVIDUALLY ADDRESSABLE

- 9 diodes per 2" cut point
- 98+ CRI at 3000K
- Uses DMX and SPI protocols to control nominal 1" segments
- Dry rated

STATIC WHITE EXTREME TEMPERATURE

- 2" cut point
- 90+ CRI at 3000K
- Suitable for saunas and steam rooms
- Wet rated
- Rated temperature range: -40°F to 195°F

STATIC WHITE STANDARD

- 6 diodes per 2" cut point
- 90+ CRI
- Cost effective
- Dry and wet rated

STATIC COLOR

- 6 diodes per 2" cut point
- Red, green, blue and amber
- FWC Certified in red and amber
- Dry, damp, and wet rated

DYNAMIC WHITE HIGH EFFICACY

- 14 diodes per 2" cut point
- Can either be controlled as Warm Dim or Tunable White
- Dry, damp, and wet rated

RGB

- 7 diodes per 2" cut point
- RGB linear LED strip for color-changing applications
- Dry, damp, and wet rated

RGBW

- 12 diodes per 4" cut point
- 6 diodes for RGB and 6 diodes for static white
- Dry, damp, and wet rated

RGBW HIGH EFFICACY

- 21 diodes per 2" cut point
- 7 diodes for RGB and 14 diodes for static white
- Best solution for diode free applications with a lens
- Dry, damp, and wet rated




ABOUT
STRIPS

EXTRUSIONS

FINISHED EXTRUDED FIXTURE

- Diode-free, UV stable lens options
- Multiple mounting accessories for easy install
- Thermal management and heat dissipation
- Field installed, high-quality anodized aluminum
- Field installation allows for long continuous lines on light
- All extrusions have Declare labels



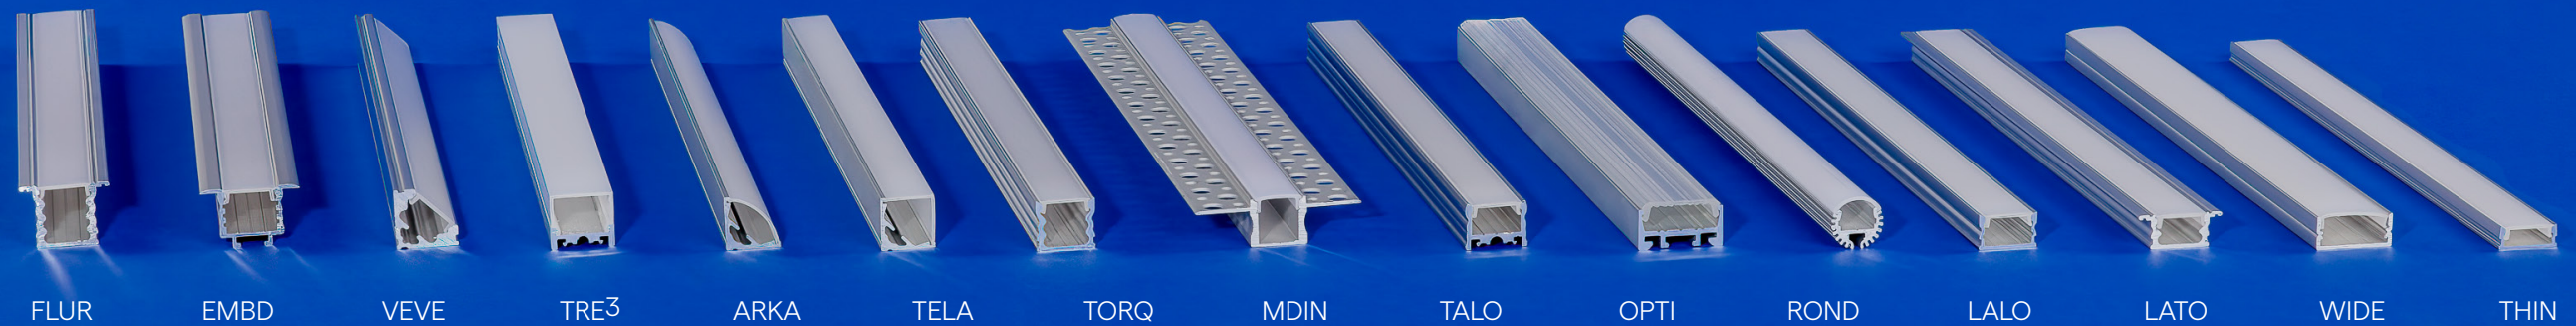















Red List
Free





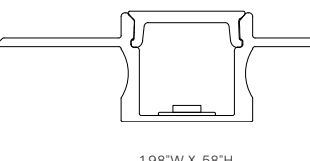



Declare.







ABOUT
EXTRUSIONS



ANGLED	FLAT LENS	OPTICAL LENS
VEVE 45° flat lens	 .71"W X .71"H 100°	 .71"W X .71"H 20°/45°
ARKA 45° curved lens with optional WhiteOptics (Internal coating greater lumen output)	 .63"W X .63"H 130°	 .63"W X .63"H 130°
TELA Two-side 90° lens with optional WhiteOptics (Internal coating greater lumen output)	 .63"W X .63"H 130°	 .63"W X .63"H 130°

SURFACE	FLAT LENS	OPTICAL LENS
TRE3 Three-sided lens for grid ceiling or surface applications	 .74"W X .68"H 136°	 .74"W X .68"H 136°
TORQ Surface or recessed profile with optics and optional WhiteOptics	 .70"W X .60"H 60°/70°	 .70"W X .72"H 12°/40°
TALO Low profile extrusion with concealed mounting for grid ceiling applications	 .74"W X .56"H 80°	 .74"W X .56"H 80°
ROND Round fixture, can be turned 45° degrees	 .62"W X .62"H 93°	 .62"W X .62"H 93°
OPTI Precision beam control with a range of optics	 1.0"W X (.54"-.79")H 40°/60°/70°/90°/110°/155°/180°/ASYM/FT	 1.0"W X (.54"-.79")H 40°/60°/70°/90°/110°/155°/180°/ASYM/FT


RECESSED	FLAT LENS	OPTICAL LENS
FLUR Narrow recessed flanged profile with an optional mounting tray and a clear lens to create a 45°, 60°, or 80° cutoff	 1.0"W X .75"H 45°/60°/80°	 1.0"W X .75"H 45°/60°/80°
EMBD Recessed flanged profile designed for drywall installations	 1.14"W X .71"H 12°/14°/20°	 1.14"W X .83"H 30°/45°/60°
MDIN Flush mud-in profile	 1.98"W X .58"H 117°	 1.98"W X .58"H 117°
LATO Shallow flanged fixture for recess mounting with optional WhiteOptics (Internal coating greater lumen output)	 1.0"W X .41"H 100°	 1.0"W X .41"H 100°

LOW-PROFILE	FLAT LENS	OPTICAL LENS
LALO Low profile extrusion with optional optic	 .70"W X .42"H 78°	 .70"W X .54"H 17°
WIDE Broad and low profile can fit up to two rows of LEDs	 .90"W X .34"H 97°	 .90"W X .34"H 97°
THIN Ultra low-profile	 .70"W X .28"H 109°	 .70"W X .28"H 109°

Diagrams shown in actual size

▲ Beam angle


Diode Visibility





ARKA

ARKA is a 45° angled LED extrusion with a curved lens that produces a wide 130° beam angle for cove lighting applications. It is available in satin, black, and bronze finishes with two mounting hardware options. Lens options include clear, frosted, polar, and diffused. Combine ARKA with WhiteOptics to increase light output between 2-20%.




Diode Visibility



COMPATIBLE LED STRIPS



	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

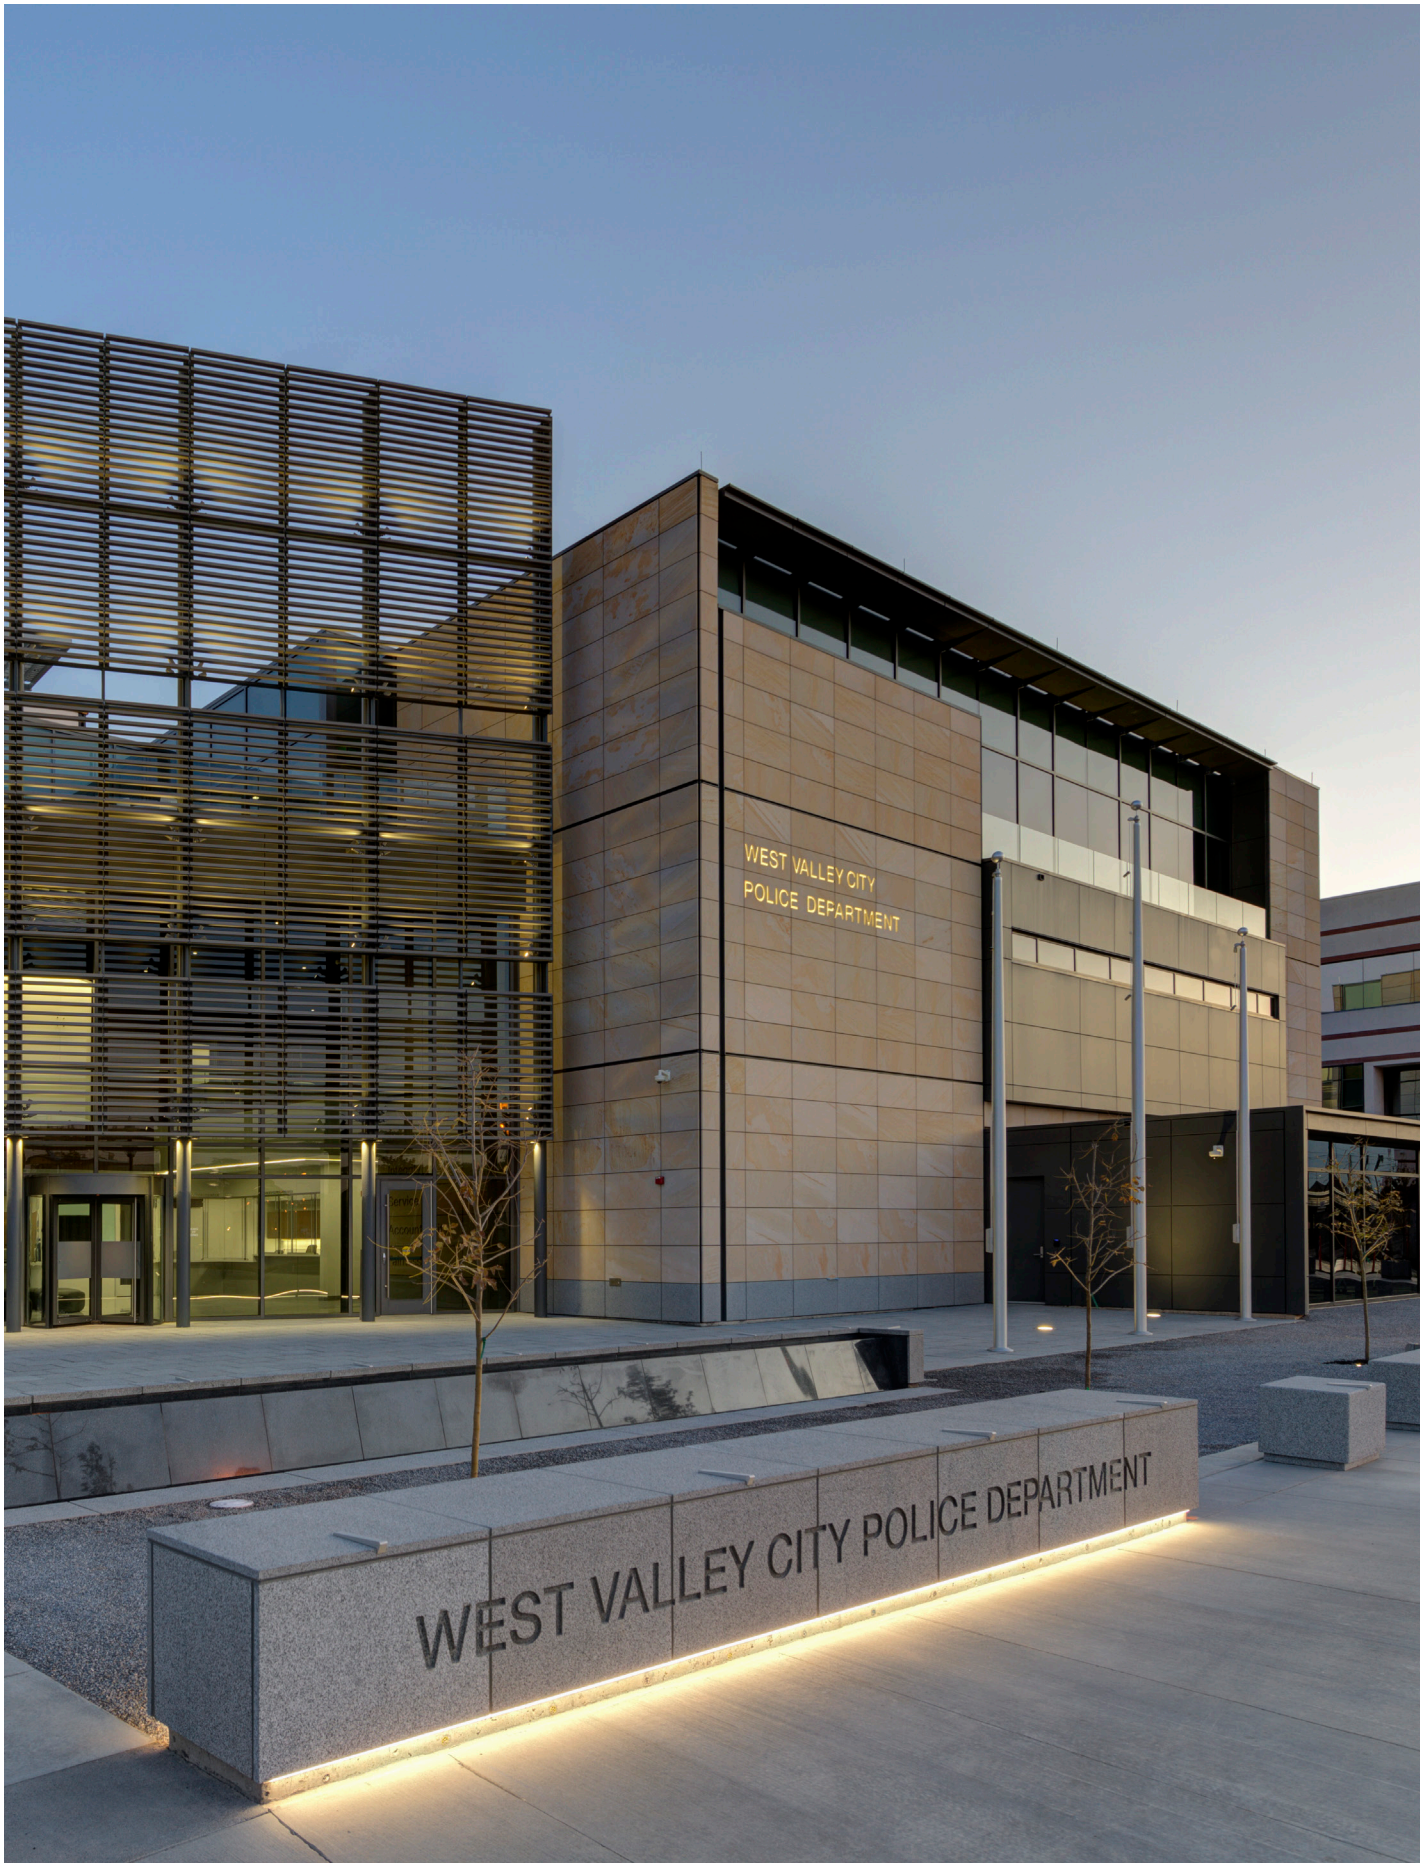


Product shown: ARKA

EMBD

EMBD is a recessed mounted aluminum extrusion. It is offered with QTL's standard lens as well as an optical lens option, that when paired with an adjustable tray creates a plethora of light beam angles. EMBD can be mounted with a magnetic bar along with recessable spring clip technology.

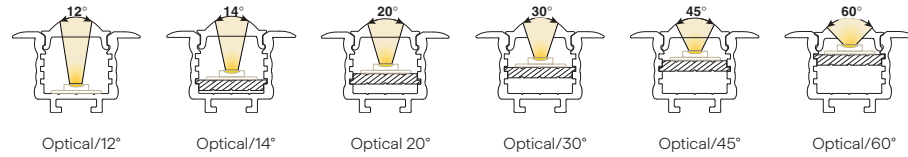


Diode Visibility




FLUR

FLUR is QTL's deepest flanged LED extrusion. Pair with an optional mounting tray and a clear lens for either a 45°, 60°, or 80° cutoff. It is available in satin and black finishes, with clear, frosted, polar, and diffused lens options. Combine with WhiteOptics to increase light output between 5-47%.

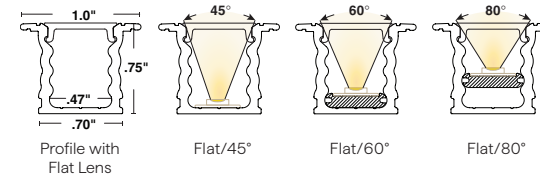

Diode Visibility



COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0, 8.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			



LALO

The LALO LED extrusion utilizes a sleek flat lens and a shadowless end cap design. Combined with a stainless steel mounting clip, this mid-low profile extrusion is ideal for lighting indirect and direct surface mount applications. Available in both satin and black finishes with five different lenses: clear, frosted, polar, diffused, and optical.



COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0




Product shown: LALO



OPTI

OPTI has an advanced assortment of optics, OPTI delivers smooth and consistent light to highlight architectural features and surfaces. Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look.

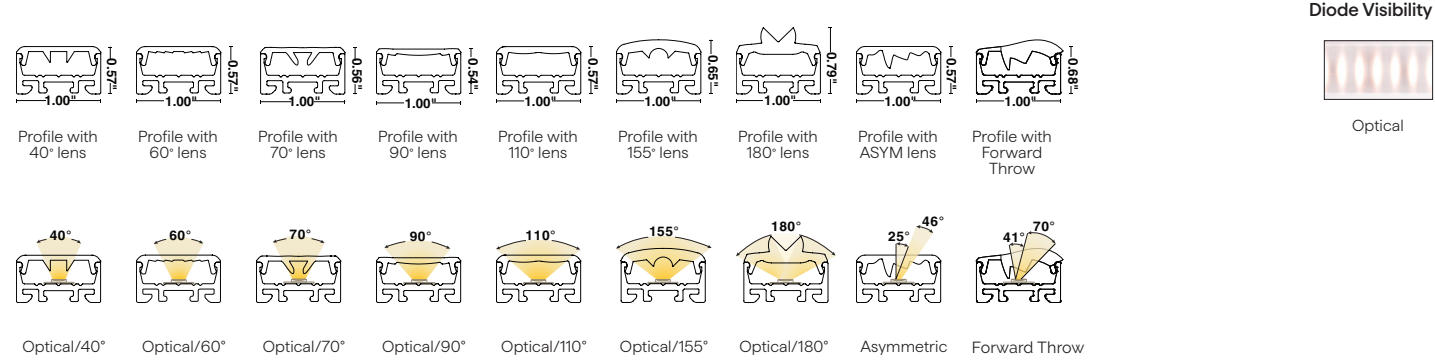

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	
DMP												
WET												





Product shown: OPTI






ROND

ROND is a unique round profile that can be rotated up to 45° in the field with the included mounting clips. High-quality aluminum housings and stainless steel clips are available in satin or black finishes. Lens options are clear, frosted, and diffused. Available in lengths up to 98.43".



SHIELD

SHIELD is flexible sleeve consisting of a carrier and silicone cover that acts as protection for LED strips. It is available in a clear or diffused finish and is offered in small, medium, and large sizes to accommodate a variety of light engine widths.

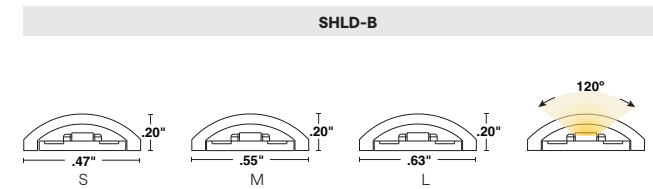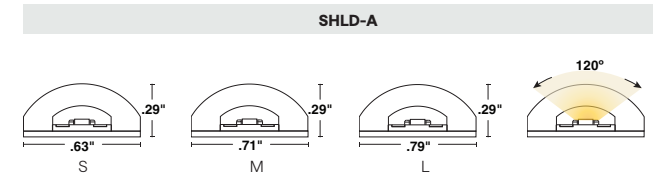

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0		✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0						✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET												




COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY												
S	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 2.0, 4.0, 6.0						✓ W/FT: 5.0			
M		✓ W/FT: 5.0			✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0		✓ W/FT: 6.0		✓ W/FT: 4.0
L				✓ W/FT: 1.5, 3.0, 6.0							✓ W/FT: 6.0	




TALO

TALO's modern design is complemented by its sleek flat lens and end caps that promote full luminosity. It not only utilizes a hidden stainless steel mounting clip but is also compatible with a plastic T-Bar clip for grid ceiling applications and can be used with LEDs up to 6.0 watts/foot. Available in both satin and black finishes, TALO also offers a range of lens choices including clear, polar, frosted, and diffused options.

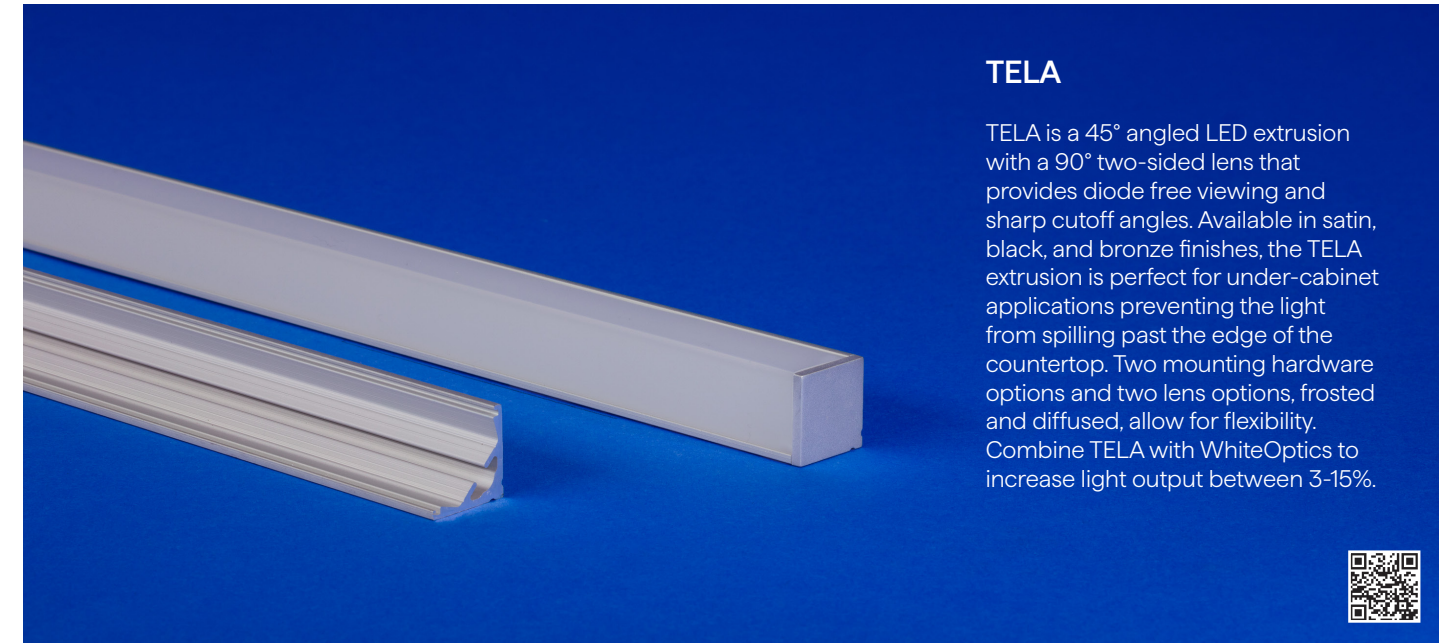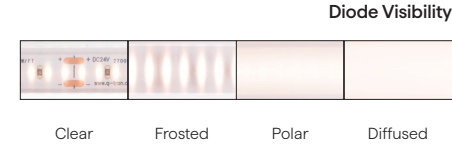

TELA

TELA is a 45° angled LED extrusion with a 90° two-sided lens that provides diode free viewing and sharp cutoff angles. Available in satin, black, and bronze finishes, the TELA extrusion is perfect for under-cabinet applications preventing the light from spilling past the edge of the countertop. Two mounting hardware options and two lens options, frosted and diffused, allow for flexibility. Combine TELA with WhiteOptics to increase light output between 3-15%.






COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0

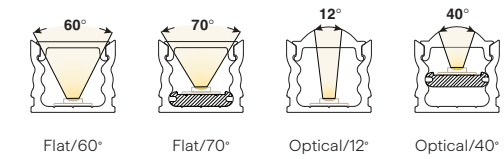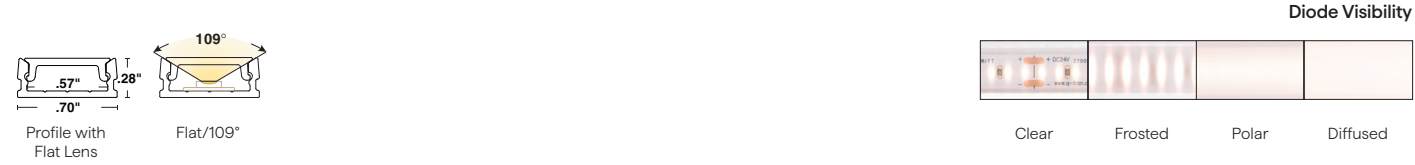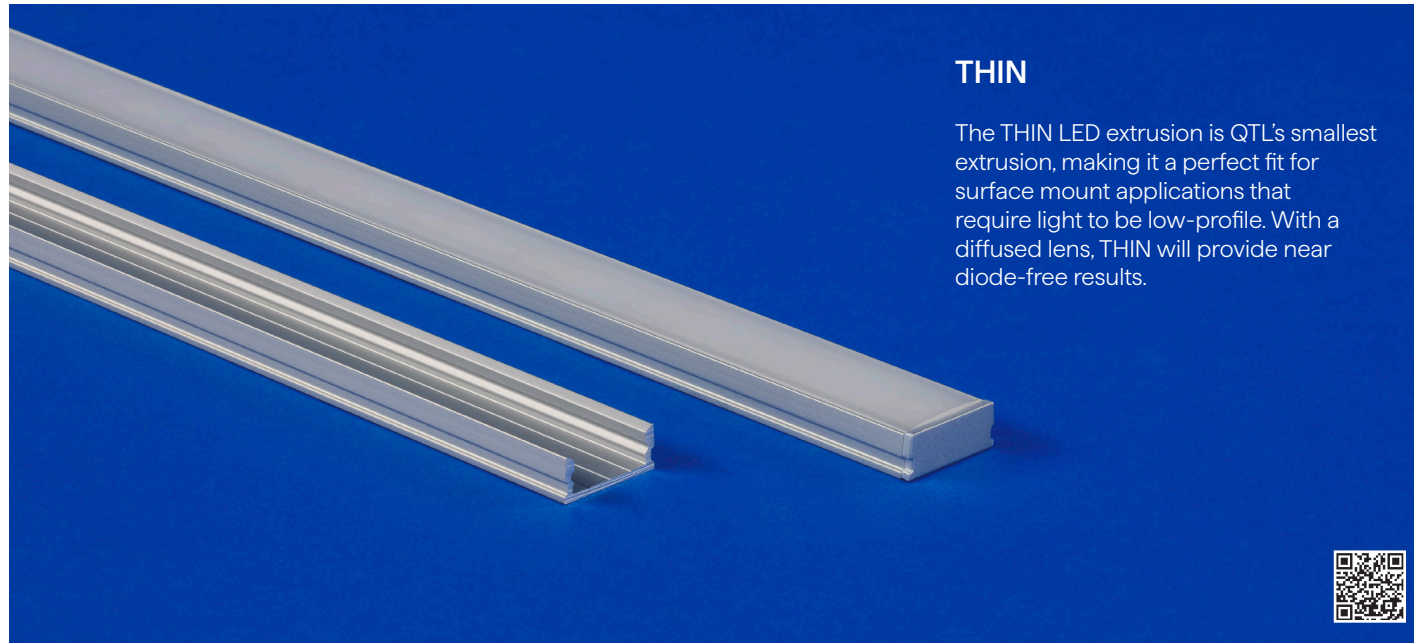

COMPATIBLE LED STRIPS


	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 5.0			✓ W/FT: 1.5, 3.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0		✓ W/FT: 3.0			✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0, 9.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0, 8.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0		✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			

TRE3

The TRE3 LED extrusion is an impressive solution for grid ceiling applications and surface mount applications because of its unique three-sided lens. This innovative design element creates an illusion of invisibility when illuminated, seamlessly blending the extrusion with the surrounding space. TRE3 provides two expertly designed clips for installation. The discreet stainless steel clip suits surface mounting, while the ceiling-mounted plastic T-Bar clip offers an effortless solution for grid ceilings.




Diode Visibility



Diffused

VEVE

The VEVE LED extrusion is designed with a 45° lens that delivers a precise narrow beam cutoff. VEVE takes center stage in applications that call for light to be flush in a corner. Offered in satin, black, and bronze finishes in five different lenses; clear, frosted, polar, diffused, and optical.

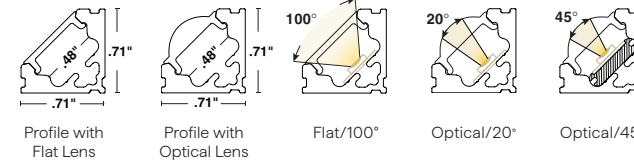

Diode Visibility



Clear Frosted Polar Diffused Optical

COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0			✓ W/FT: 3.0			✓ W/FT: 5.0			


COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0						✓ W/FT: 5.0			




WIDE

The WIDE LED extrusion is QTL's widest profile extrusion, making it able to fit even our widest LEDs: RGBW. It is available in satin, black, and bronze finishes and is offered in three different lenses; clear, polar, and diffused. With a clear lens, its light transmission is 97%.



Diode Visibility



COMPATIBLE LED STRIPS

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STANDARD (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	STATIC WHITE EXTREME TEMP (SW-XT)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	WARM DIM (WD)	STATIC COLOR (SC)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
DRY	✓ W/FT: 1.5, 3.0, 4.0, 5.0	✓ W/FT: 5.0	✓ W/FT: 1.0, 2.0, 4.0, 6.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0		✓ W/FT: 1.5, 2.5, 4.0	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
DMP	✓ W/FT: 1.5, 3.0, 4.0, 5.0			✓ W/FT: 1.5, 3.0, 6.0			✓ W/FT: 1.5, 2.5		✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0
WET	✓ W/FT: 1.5, 3.0, 4.0, 5.0		✓ W/FT: 1.0, 2.0, 4.0	✓ W/FT: 1.5, 3.0, 6.0	✓ W/FT: 3.0, 6.0	✓ W/FT: 3.0	✓ W/FT: 1.5, 2.5	✓ W/FT: 6.0	✓ W/FT: 5.0	✓ W/FT: 6.0	✓ W/FT: 6.0	✓ W/FT: 4.0



Product shown: WIDE

